



New Features - Multiple language capabilities and graphing!

YSI 556 Multiprobe System


Versatile, multiparameter handheld instrument

Rugged and reliable, the YSI 556 MPS (Multiprobe System) combines the versatility of an easy-to-use, easy-to-read handheld unit with all the functionality of a multiparameter system.

- Simultaneously measures dissolved oxygen, pH, conductivity, temperature, and ORP
- Field-replaceable electrodes
- Compatible with EcoWatch[®] for Windows[®] data analysis software
- Stores over 49,000 data sets, time and date stamped, interval or manual logging
- Three-year warranty on the instrument; one-year on the probes
- GLP assisting, records calibration data in memory
- Available with 4, 10, and 20 m cable lengths
- IP-67, impact-resistant, waterproof case
- Easy-to-use, screw-on cap DO membranes
- RS-232 interface for PC connection

Packed With Features!


- Battery Options – The unit is powered by alkaline batteries or an optional rechargeable battery pack with quick-charge feature.
- Optional Barometer – Internal barometer can be user-calibrated and displayed along with other data, used in dissolved oxygen calibrations, and logged to memory for tracking changes in barometric pressure.
- Optional Flow Cell - The 5083 flow cell can be used for groundwater applications or anytime water is pumped.
- Carrying Case – The instrument comes standard with YSI 5061, a soft-sided carrying case with enough space for the YSI 556 MPS, a 20-meter cable, and calibrating supplies.
- Handstrap - The handstrap can be connected on either the right or left side of the instrument.

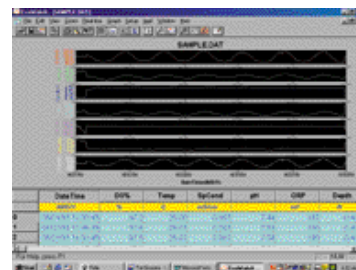

EcoWatch[®] software screen shot

Pure Data for a Healthy Planet.™

A rugged, cost-effective Multiprobe System — designed for the field!

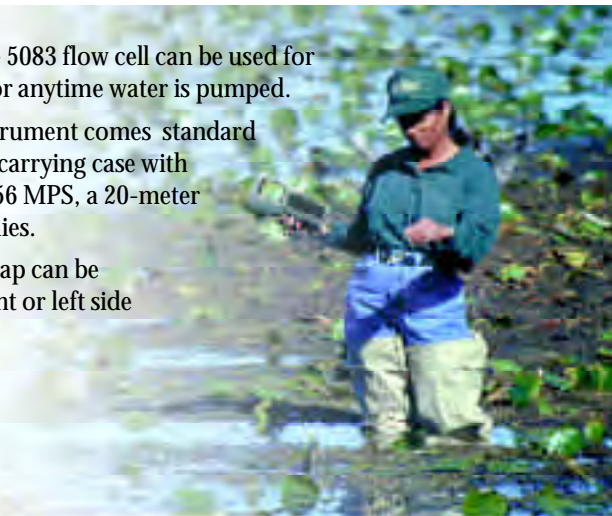



Pure
Data for a
Healthy
Planet.™

To order or for more
information, contact
YSI Environmental.

800 897-4151

www.YSI.com

YSI Environmental
937 767 7241
Fax 937 767 9353
environmental@YSI.com

Endeco/YSI
508 748 0366
Fax 508 748 2543
environmental@YSI.com

YSI Environmental
European Support Centre
44 1730 710 615
Fax 44 1730 710 614
europe@YSI.com

YSI (Hong Kong) Limited
852 2891 8154
Fax 852 2834 0034
hongkong@YSI.com

YSI/Nanotech (Japan)
81 44 222 0009
Fax 81 44 222 1102
nanotech@YSI.com

YSI (Qingdao) Limited
86 532 389 6648
Fax 86 532 389 6647
china@YSI.com

ISO 9001
ISO 14001

EcoWatch, Who's Minding the Planet? and Pure Data for a Healthy Planet are trademarks of YSI Incorporated. Windows is a registered trademark of Microsoft Corporation.

Printed in USA 0203 W11-04



YSI incorporated
Who's Minding
the Planet?™

YSI 5563 MPS Sensor Specifications

Dissolved Oxygen (% saturation)	Sensor Type Range Accuracy	Steady state polarographic 0 to 500% air saturation 0 to 200% air saturation, ± 2% of the reading or ±2% air saturation, whichever is greater; 200 to 500% air saturation, ± 6% of the reading
	Resolution	0.1% air saturation
Dissolved Oxygen (mg/L)	Sensor Type Range Accuracy	Steady state polarographic 0 to 50 mg/L 0 to 20 mg/L, ± 2% of the reading or ±0.2 mg/L, whichever is greater; 20 to 50 mg/L, ± 6% of the reading
	Resolution	0.01 mg/L
Temperature	Sensor Type Range Accuracy Resolution	YSI Temperature Precision™ thermistor -5 to 45°C ± 0.15°C 0.1°C
Conductivity	Sensor Type Range Accuracy	4-electrode cell with autoranging 0 to 200 mS/cm ± 0.5% of reading or ± 0.001 mS/cm; whichever is greater (4 meter cable) ± 1.0% of reading or ± 0.001 mS/cm; whichever is greater (20 meter cable)
	Resolution	0.001 mS/cm to 0.1 mS/cm (range-dependent)
Salinity	Sensor Type Range Accuracy Resolution	Calculated from conductivity and temperature 0 to 70 ppt ± 1.0% of reading or ±0.1 ppt, whichever is greater 0.01 ppt
pH (optional)	Sensor Type Range Accuracy Resolution	Glass combination electrode 0 to 14 units ±0.2 units 0.01 units
ORP (optional)	Sensor Type Range Accuracy Resolution	Platinum button -999 to +999 mV ± 20 mV 0.1 mV
Total Dissolved Solids (TDS)	Sensor Type Range Resolution	Calculated from conductivity (variable constant, default 0.65) 0 to 100 g/L 4 digits
Barometer (optional)	Range Accuracy Resolution	500 to 800 mm Hg ± 3 mm Hg within ± 15°C temperature range from calibration point 0.1 mm Hg

YSI 556 Instrument Specifications

Size	11.9 cm width x 22.9 cm length (4.7 in. x 9 in.)
Weight with batteries	2.1 lbs. (916 grams)
Power	4 alkaline C-cells; optional rechargeable pack
Cables	4, 10, and 20 m (13.1, 32.8, 65.6 ft.) lengths
Warranty	3-year for the instrument; 1-year for the probes and cable
Communication Port	RS-232 Serial
Data Logger	49,000 Data sets with date and time stamp, manual or logging, with user-selectable save rate

Order instrument, cable, and accessories separately.

556-01	Instrument (with 5061 large, soft-sided carrying case)
556-02	Instrument with barometer option
5563-4	4 m cable and DO/temp/conductivity
5563-10	10 m cable and DO/temp/conductivity
5563-20	20 m cable and DO/temp/conductivity
5564	pH Probe
5565	pH/ORP Probe
6118	Rechargeable battery pack kit (includes battery, adapter, charger)
614	Ultra clamp, C-clamp mount
616	Charger, cigarette lighter
4654	Tripod
5060	Small carrying case, soft-sided (fits instrument and 4 m cable)
5061	Large carrying case, soft-sided (comes with 556 standard)
5065	Form-fitted carrier with shoulder strap
5080	Small carrying case, hard-sided (fits instrument and 4 m cable)
5083	Flow cell
5085	Hands-free harness
5094	Rechargeable battery pack kit, Europe
5095	Rechargeable battery pack kit, Australia
6081	Large carrying case, hard-sided (fits instrument and 20 m cable)
6075	EcoWatch® for Windows®

For more information on YSI's full line of products and services, as well as application notes, FAQs, troubleshooting, and more, check our information-packed website. Be sure to see the YSI 556 MPS feature page which outlines the advantages and benefits of this new technology at www.YSI.com/556MPS